

Bitzer 6G-30.2Y (x2)

Specifications

Marka	Bitzer
Typ	6G-30.2Y (x2)
Czynnik chłodzący	Freon
kW at -5°C/+40°C	168,0
kW at -10°C/+40°C	138,6
kW at -20°C/+40°C	91,1
kW at -30°C/+40°C	55,8
kW at -40°C/+40°C	30,3
Podstawa na stalowej ramie	✓
Obiornik cieczy	✓
Separator oleju	✓
Osuszający filter lini cieczy	✓
Okno widokowe	✓
Panel kontrolny	✓
m ³ / h	253,6 at 1450 RPM
Package / Rack	✓
Rozmiary	3420x1250x1900 mm (LxWxH)
Stock	1





Description

Used Bitzer 6G-30.2Y (x2)

Used Bitzer 6G-30.2Y (x2) semi-hermetic reciprocating compressor on Freon. Each compressor complete with a Frigo-Mec FK 55 liquid receiver with a volume of 55 liter, oil separator, liquid line filter drier, pressure and safety switches/gauges. The compressor has a displacement of 126,8 m³/h at 1450 RPM.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

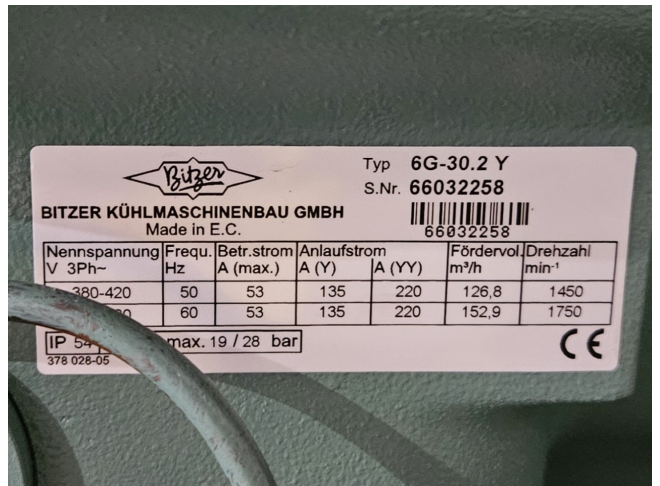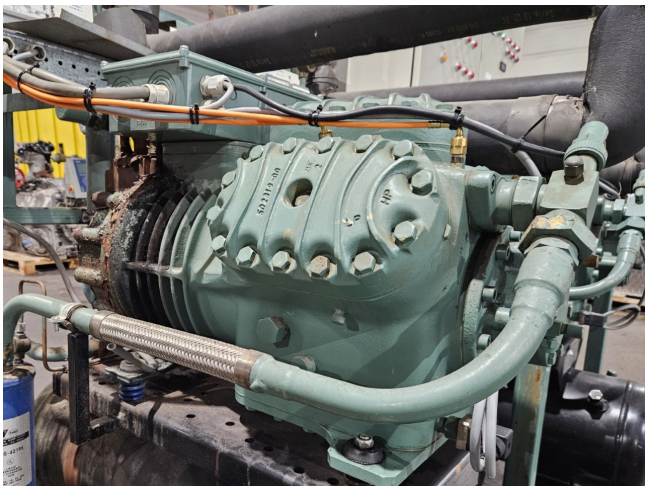

Typ 6G-30.2 Y
S.Nr. 66032258

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.

Nennspannung V 3Ph~	Frequ. Hz	Betr.strom A (max.)	Anlaufstrom A (Y)	A (YY)	Fördervol. m³/h	Drehzahl min⁻¹
380-420	50	53	135	220	126.8	1450
	60	53	135	220	152.9	1750

max. 19 / 28 bar

IP 54
378 028-05

CE

