

Bitzer HSN 8571-125-40P (x3)

Specifications

Бренд	Bitzer
Тип	HSN 8571-125-40P (x3)
Хладагент	Freon
кВт at -20°C/+40°C	594,6
кВт at -30°C/+40°C	409,0
кВт at -40°C/+40°C	268,3
kW at -45°C/+40°C	211,6
Разгруженный старт	✓
Управление	✓
производительностью	
На стальной раме	✓
Прессостаты	✓
Манометры	✓
Прессостаты	✓
конденсатора	
Жидкостный ресивер	✓
Маслоотделитель	✓
Соленоидный клапан	✓
м3 / h	1230
Примечания	Y.o.b. 2017
Примечания	Please note: we will only offer this as complete blastfreezing solution with capacity matching condensor and evaporators.
Package / Rack	✓



Размеры	7200x2700x2350 mm (LxWxH)
---------	------------------------------

Stock	1
-------	---



Description

Used Bitzer HSN 8571-125-40P (x3)

Used Bitzer HSN 8571-125-40P semi-hermetic screw compressor rack on Freon build in 2017. Complete with plate heat exchangers functioning as economizer, 2x Bitzer OA9111 oil separators with a volume of 228 liter, 2x TECNAC RV-508-140 liquid receiver with a volume of 140 liter and pressure and safety switches/gauges. The compressors together have a displacement of 1230 m³/h. It is possible to install a new 4th compressor on the unit. Contact us for more information.

Please note: we will only offer this as complete blastfreezing solution with capacity matching condensor and evaporators.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

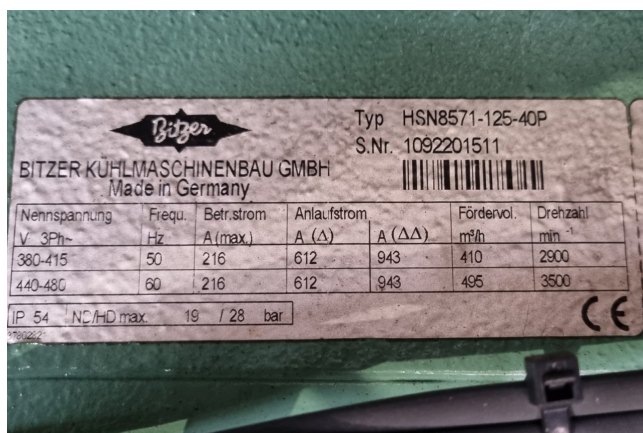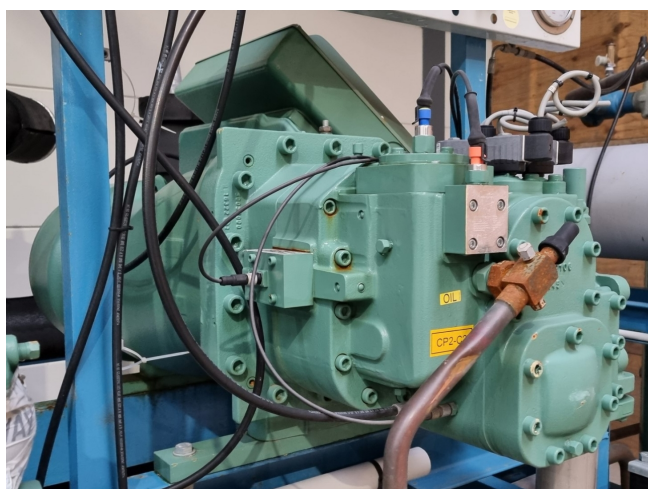

 Typ HSN8571-125-40P BITZER KÜHLMASCHINENBAU GMBH Made in Germany S.Nr. 1092201511						
Nennspannung	Frequ.	Betr.strom	Anlaufstrom	Fördervol.	Drehzahl	
V 3Ph~	Hz	A (max.)	A (Δ)	m³/h	min⁻¹	
380-415	50	216	612	410	2900	
440-480	60	216	612	495	3500	
IP 54 NC/HO max. 19 / 28 bar						

