Bitzer 6G-30.2 Y

Specifications

Brand	Bitzer
Type	6G-30.2 Y
Refrigerant	Freon
kW at -5ºC/+40ºC	84,0
kW at -10ºC/+40ºC	69,3
kW at -20ºC/+40ºC	45,5
kW at -30ºC/+40ºC	28,0
kW at -40ºC/+40ºC	15,1
kW at -45ºC/+40ºC	10,2
Unloaded Start	✓
Pressure safety switches Hp/Lp/Op	✓
Sight Glass	✓
m3 / h	126,8
Weight in kg.	228
Sizes	750x460x560 mm (LxWxH)
Stock	1

Description

Used Bitzer 6G-30.2 Y

Used Bitzer 6G-30.2 Y semi-hermetic reciprocating compressor on Freon. Complete with a sight glass and pressure safety switch. The compressor has a displacement of 126,8 m³/h at 1450 RPM and 152,9 m³/h at 1750 RPM. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if they passed our extensive test. If requested we are happy to arrange your shipment.

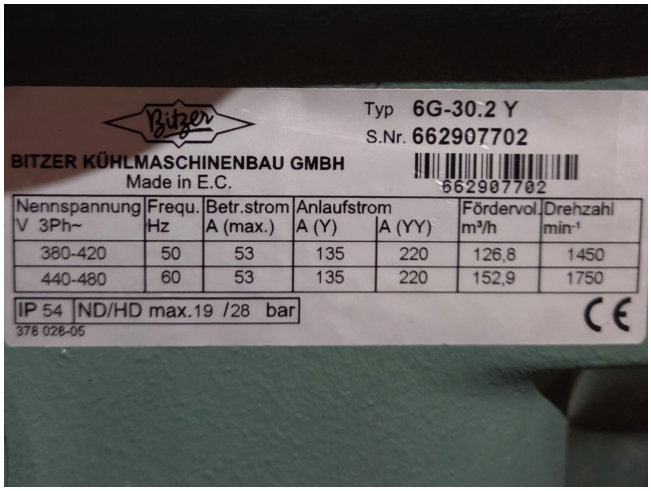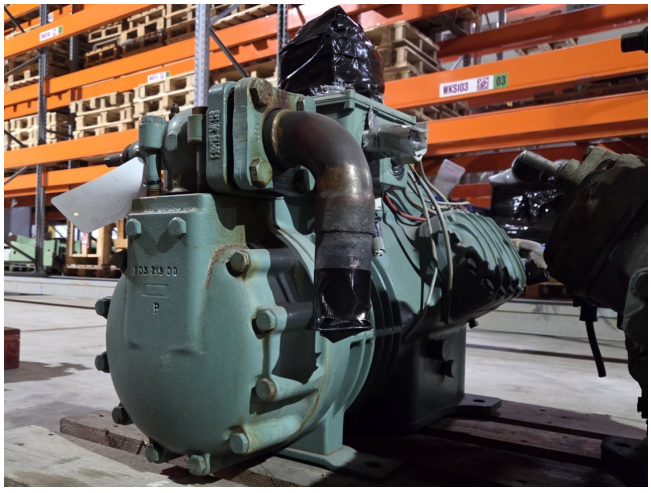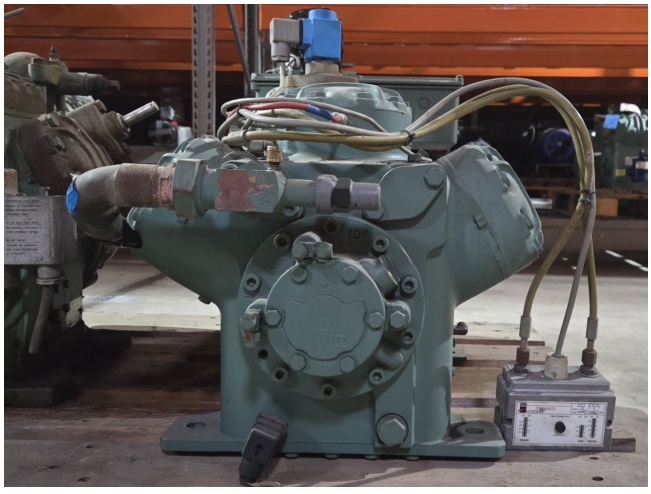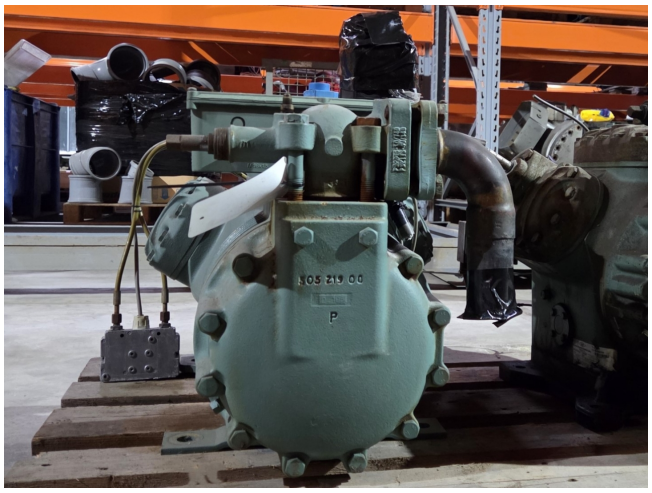
Typ 6G-30.2 Y
S.Nr. 662907702
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
662907702
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 53 | 135 | 220 | 126,8 | 1450
440-480 | 60 | 53 | 135 | 220 | 152,9 | 1750
IP 54 | ND/HD max.19 /28 bar
378 028-05