

DWM D2DB3-750-AWM/D cool package

Specifications


| | |
|----------------------|------------------------------|
| Brand | DWM |
| Type | D2DB3-750-AWM/D cool package |
| Refrigerant | Freon |
| kW at +10°C/+40°C | 31.91 |
| kW at 0°C/+40°C | 22.23 |
| kW at -5°C/+40°C | 18.27 |
| kW at -10°C/+40°C | 14.81 |
| kW at -20°C/+40°C | 9.80 |
| Liquid receiver | ✓ |
| Liquid receiver ltr. | 50 |
| Oil separator | ✓ |
| Control panel | ✓ |
| m ³ / h | 28 |
| Package / Rack | ✓ |
| Stock | 1 |



Description

Used DWM D2DB3-750-AWM/D cool package

Used, DWM D2DB3-750-AWM/D Semi-hermetic piston compressor and consisting components. You can also use this compressor on alternative types of Freon. For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

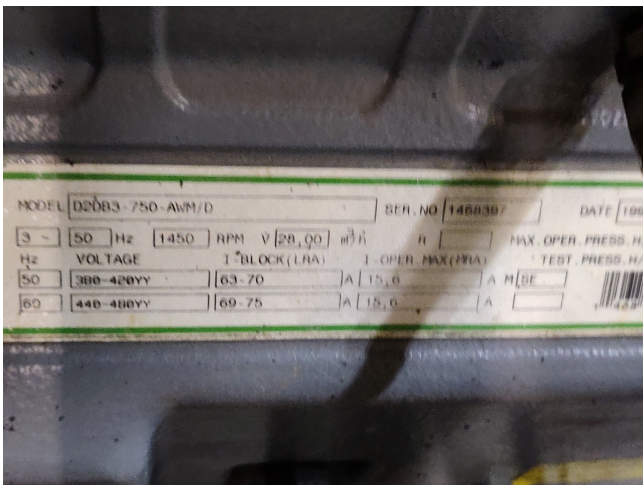

Model: D2DB-750
Capacity

R22

Cooling capacity [kW]

| t _c \ t _e | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 |
|---------------------------------|------|-------|-------|-------|-------|-------|-------|-------|
| 30 | 8.30 | 10.73 | 13.54 | 16.81 | 20.57 | 24.89 | 29.82 | 35.41 |
| 35 | 7.62 | 9.96 | 12.67 | 15.81 | 19.42 | 23.57 | 28.30 | 33.67 |
| 40 | 6.94 | 9.20 | 11.80 | 14.81 | 18.27 | 22.23 | 26.76 | 31.91 |
| 45 | - | 8.45 | 10.94 | 13.81 | 17.11 | 20.89 | 25.22 | 30.14 |
| 50 | - | 7.72 | 10.09 | 12.82 | 15.96 | 19.56 | 23.67 | 28.36 |
| 55 | - | - | 9.26 | 11.85 | 14.82 | 18.23 | 22.13 | 26.58 |
| 60 | - | - | 8.45 | 10.89 | 13.69 | 16.91 | 20.59 | 24.80 |

Power input [kW]

| t _c \ t _e | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 |
|---------------------------------|------|------|------|------|------|------|------|------|
| 30 | 3.53 | 3.86 | 4.16 | 4.40 | 4.57 | 4.64 | 4.61 | 4.46 |
| 35 | 3.69 | 4.09 | 4.44 | 4.75 | 5.00 | 5.16 | 5.23 | 5.19 |
| 40 | 3.85 | 4.29 | 4.71 | 5.09 | 5.41 | 5.66 | 5.82 | 5.88 |
| 45 | - | 4.49 | 4.97 | 5.41 | 5.81 | 6.14 | 6.39 | 6.55 |
| 50 | - | 4.68 | 5.21 | 5.72 | 6.18 | 6.59 | 6.94 | 7.19 |
| 55 | - | - | 5.45 | 6.01 | 6.55 | 7.04 | 7.46 | 7.81 |
| 60 | - | - | 5.67 | 6.30 | 6.90 | 7.46 | 7.97 | 8.41 |