


Sabroe SAB 128 HF

Specifications


Hersteller	Sabroe
Typ	SAB 128 HF
Kältemittel	NH 3 / Freon
kW at 0°C/+40°C	385.2
m3 / h	454/547
Bemerkungen	Our capacity table is based on Manufacturer spec. We would like to know which refrigerant is in your system
Bemerkungen	2950/3550RPM
Bemerkungen	serial number 92013
Gewicht in kg.	1150
Größe	930x830x600mm (LxWxH)
Stock	1

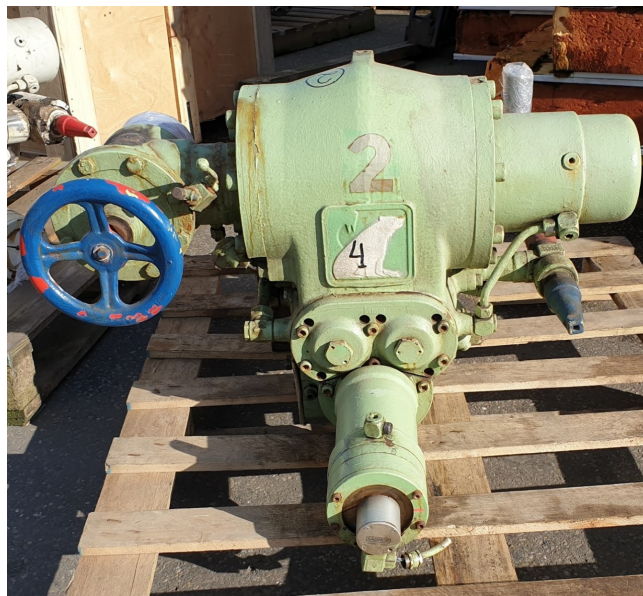

Description

Used Sabroe SAB 128 HF

Used Sabroe SAB 128 HF screw compressor. Size 930x830x600mm (LxWxH), Weight 1150kg, 454/547m3/h, 2950/3550RPM *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics

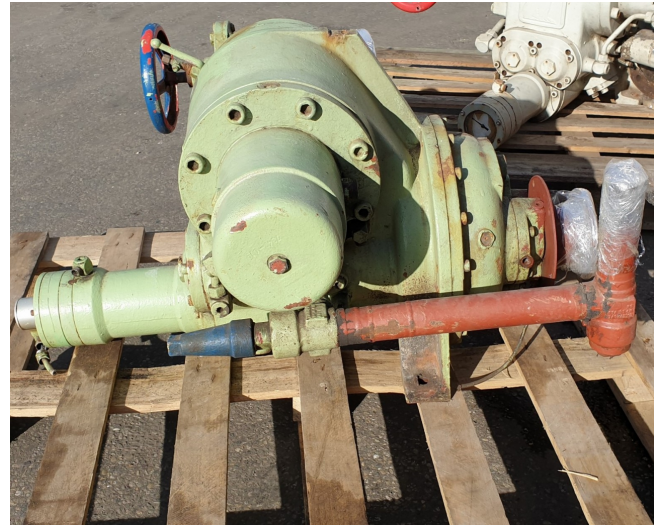

Cooling capacities * kW at 2960 rpm

Model	R717		R22		R404A		With economiser		
	High stage	Booster	High stage	High stage	High stage	High stage	R717	R22	R404A
	-10/+35 °C	-40/-10 °C	-10/+35 °C	0/+40 °C	-10/+35 °C	0/+40 °C	-40/+35 °C	-40/+35 °C	-40/+35 °C
SAB 128 HM	187.9	58.9	178.4	240.5	183.9	245.4	50.3	64.7	73.5
SAB 128 HF	294.9	92.5	280.0	379.4	288.6	385.2	78.9	101.0	113.9

* 5 °K liquid sub-cooling / 5 °K suction superheat for R717 / 15 °C suction superheat for R404A and R22

Technical data

Model	Swept volume ⁽¹⁾		Dimensions ⁽²⁾			Weight ⁽³⁾	Sound pressure level ⁽⁴⁾
	2950 rpm m³/h	3550 rpm m³/h	Length mm	Width mm	Height mm	kg	dB(A)
SAB 128 HM	303	364	2200	1420	1405	1150	84
SAB 128 HF	454	547	2200	1420	1405	1150	86

(1) Drive motor speed – (2) With refrigerant-cooled oil cooler – (3) Excluding electric motor – (4) Free field – one metre distance

© 2015 HOS BV. All rights reserved. HOS BV is a registered trademark.

