

Kampmann kompact 3000

Specifications


Brand	Kampmann
Type	kompact 3000
Specification	luchtverhitter / bouwverwarmer
Stock	2



Description

Used Kampmann kompact 3000

used kampmann Kompact 3000 air heater / construction heater on water. Ideal for heating large spaces. The Kampmann has a total air volume of 3380 m³/h and has a speed of 1350 rotations per minute. In the middle is a heat exchanger with 4 mm space between them. The rotor fan is of the brand Ziehl-Abegg and has a diameter of 420 mm. Sizes: 830x590x640 mm (LxWxH).

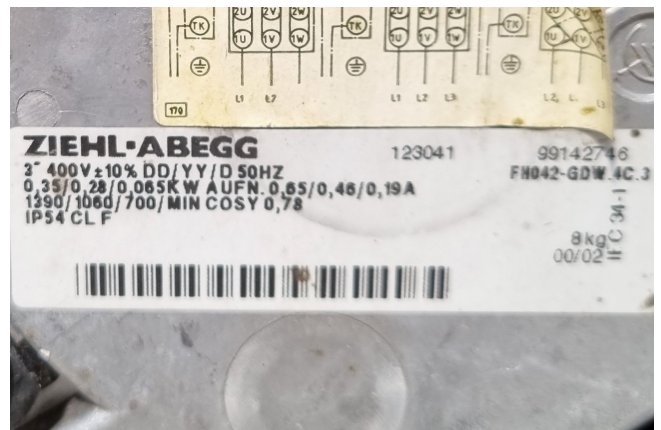

Bezeichnung: Lufterhitzer Kompakt 3000 Description: Wärmet. Kreuzgeg. str. SI Désignation: 		
Nennspannung: Voltage: Tension nominale:	400V 3 ~ 50 Hz	
Drehzahl: Speed: Vitesse:	700/1050/1350	1/min
Nennstrom: Amperage: Intensité du courant:	0,22/0,45/0,67	A
Nennleistung: Power: Puissance nominale:	80/280/350	W
max. Ansaugtemp. am Motor: max. air inlet temp.: Temp. maxi d'aspiration au moteur:	40	°C
Luftvolumenstrom (freiblasend): Air volume: Debit d'air (soufflage libre):	1620/2600/3380	m³/h
Nennwärmeleistung: Heat output: Puissance calorifique nominale:	11,2/15,0/17,4	kW
Heizmedium/Ansaugtemperatur: EWT/LWT/EAT: Liquide calorif./Temp. d'aspiration:	PWW 80/40/20	°C
max. Betriebsdruck: max. operating pressure: Pression de fonctionnement maxi:	10	bar
max. Betriebstemperatur: max. operating temp.: Temp. de fonctionnement maxi:	150	°C
Serien Nr./Serial no./No de série: 00520520683		
Typ/Type no./Type: 15200035335		
  D-49811 Lingen/Ems		

