

Bitzer IIIY Condensing Unit

Specifications

Brand	Bitzer
Type	IIIIY Condensing Unit
Refrigerant	Freon
kW at +10°C/+40°C	3,5*
kW at 0°C/+40°C	2,3*
kW at -5°C/+40°C	1,3*
kW at -10°C/+40°C	0,6*
kW at -20°C/+40°C	0,4*
Liquid receiver	✓
Liquid receiver ltr.	5,6 l
Liquid line filter drier	✓
Sight Glass	✓
m3 / h	4,0-9,4 m ³ /h
Remarks	Y.o.b. 2006
Remarks	* Freon type R404A and motor pulley 130mm
Condensing Unit	✓
Sizes	850x600x620 mm (LxWxH)
Stock	1




Description


Used Bitzer IIIY Condensing Unit

Used Bitzer L40/IIIIY condensing unit on Freon. Complete with a Bitzer IIIY semi-hermetic reciprocating compressor, condenser with 1 fan, Bitzer FS 53 liquid receiver with a volume of 5,6 liters, rotor nl UD 0701/1048670-034-9 electric motor - 50/60 Hz - 6,4/3,45 kW - 1410/1710 RPM, Danfoss DML 083 liquid line filter drier and a sight glasses. The compressor has a displacement between 4,0 m³/h and 9,4 m³/h.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

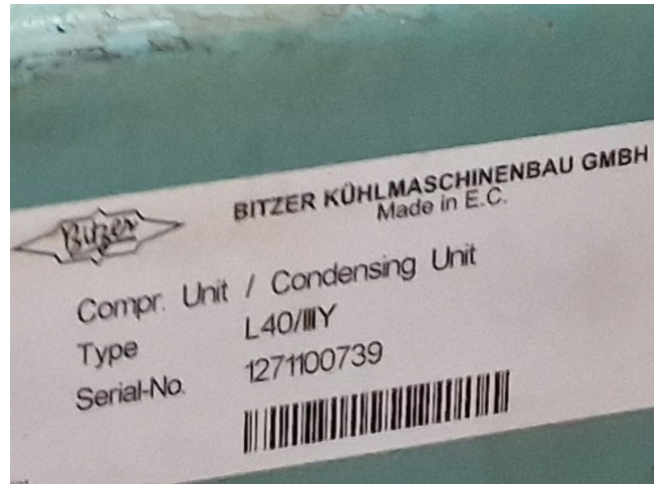



		Typ III Y
BITZER KÜHLMASCHINENBAU GMBH		S.Nr. 1271100717
Made in E.C.		
Fördervolumen m³/h	Drehzahl min⁻¹	
4,0- 9,4	430-1000	
	*	
ND/HD max.	19 / 23 bar	37804301

