

Bock HGX4/555-4 S (x2)

Specifications

Marca	Bock
Tipo	HGX4/555-4 S (x2)
Refrigerante	Freon
kW at 0°C/+40°C	77,2
kW at -5°C/+40°C	64,2
kW at -10°C/+40°C	52,6
kW at -20°C/+40°C	33,7
kW at -30°C/+40°C	20,1
kW at -40°C/+40°C	10,8
kW at -45°C/+40°C	7,5
Piston Descargador	✓
Control de capacidad	✓
Sober Bancada	✓
Presostatos	✓
Manómetros de Presion	✓
Acumulador de succión	✓
Separador de aceite	✓
Sistema de nivel de aceite	✓
La línea de líquido filtro secador	✓
Valvula Solenoide	✓
m3 / h	88,4
Comentarios	Y.o.b. 2006
Package / Rack	✓
Tamaños	1760x1100x1500 mm (LxWxH)



Stock


1

Description

Used Bock HGX4/555-4 S (x2)

Used Bock HGX4/555-4 S (x2) semi-hermetic reciprocating Freon compressor rack on a steel base frame. Complete with a suction accumulator, 2 oil separators, Henry S-9109-CE oil reservoir, oil level regulator, pressure and safety switches/gauges. The compressor has a displacement of 88,4 m³/h.

*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

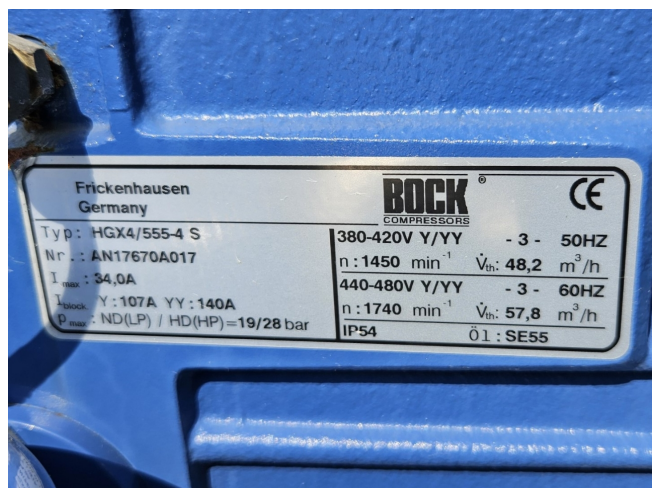

Frickenhausen Germany		BOCK COMPRESSORS	CE
Typ: HGX4/555-4 S		380-420V Y/YY	- 3 - 50HZ
Nr.: AN17670A017		n: 1450 min ⁻¹	V _{th} : 48,2 m ³ /h
I _{max} : 34,0A		440-480V Y/YY	- 3 - 60HZ
I _{block} : Y: 107A YY: 140A		n: 1740 min ⁻¹	V _{th} : 57,8 m ³ /h
P _{max} : ND(LP) / HD(HP)=19/28 bar		IP54	Öl: SE55



