


# Bitzer 4DC-7.2Y-40S

## Specifications

|                    |                           |
|--------------------|---------------------------|
| Marca              | Bitzer                    |
| Tipo               | 4DC-7.2Y-40S              |
| Refrigerante       | Freon                     |
| kW at 0°C/+40°C    | 21,1                      |
| kW at -5°C/+40°C   | 17,5                      |
| kW at -10°C/+40°C  | 14,4                      |
| kW at -20°C/+40°C  | 9,3                       |
| kW at -30°C/+40°C  | 5,5                       |
| kW at -40°C/+40°C  | 2,8                       |
| Mirilla            | ✓                         |
| m <sup>3</sup> / h | 26,9                      |
| Comentarios        | Y.o.b. 2011               |
| Peso kg.           | 88,5                      |
| Tamaños            | 550x300x400 mm<br>(LxWxH) |
| Stock              | 1                         |

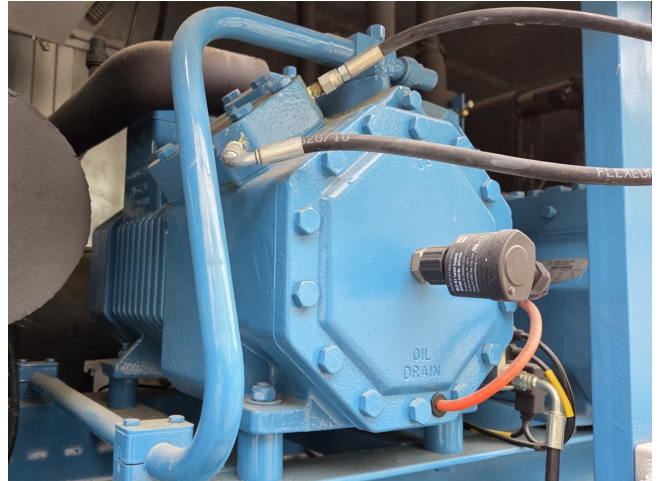

## Description

### Used Bitzer 4DC-7.2Y-40S

Used Bitzer 4DC-7.2Y-40S semi-hermetic reciprocating compressor on Freon. Complete with a sight glass and oil level system AC&R. The compressor has a displacement of 26,9 m<sup>3</sup>/h at 50 Hz and 32,4 m<sup>3</sup>/h at 60 Hz.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also perform a new paint job and arrange the logistics.

