


# Sabroe HPO 26

## Specifications

|                      |                           |
|----------------------|---------------------------|
| Marca                | Sabroe                    |
| Tipo                 | HPO 26                    |
| Refrigerante         | NH 3 (ammonia)            |
| kW at +10°C/+40°C    | 175,4                     |
| kW at 0°C/+40°C      | 114,6                     |
| kW at -5°C/+40°C     | 90,5                      |
| kW at -10°C/+40°C    | 70,2                      |
| Electromotor Specs   | 50 Hz - 75 kW - 1465 RPM  |
| Piston Descargador   | ✓                         |
| Control de capacidad | ✓                         |
| Sober Bancada        | ✓                         |
| Separador de aceite  | ✓                         |
| Mirilla              | ✓                         |
| Valvula Solenoide    | ✓                         |
| Panel de control     | ✓                         |
| m3 / h               | 142                       |
| Tamaños              | 2000x1120x1150 mm (LxWxH) |
| Stock                | 1                         |

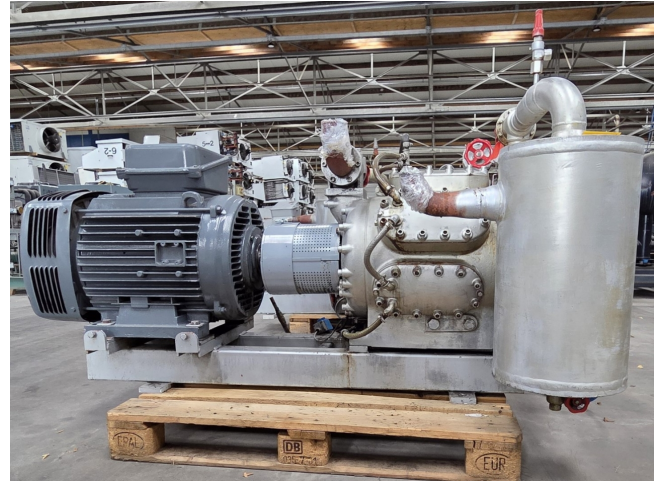

## Description

### Used Sabroe HPO 26

Used Sabroe HPO 26 R717 (Ammonia) reciprocating compressor on a steel base frame. Complete with a Leroy Somer P250 SP-4 electric motor - 50 Hz - 75 kW - 1465 RPM, Sabroe OVUR 3206 D oil separator with a volume of 39 liter and an Unisab 2 controller. The compressor has a displacement of 142 m<sup>3</sup>/h.

\*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*If requested we are happy to arrange your logistics.

