

Sabroe SMC 106 S MK2

Specifications


Marca	Sabroe
Tipo	SMC 106 S MK2
Refrigerante	Freon
kW at 0°C/+40°C	293
kW at -5°C/+40°C	191
kW at -10°C/+40°C	53
Comentarios	capacity 191kW is based on -10°C/+35°C // capacity 53kW based on -40°C/-10°C and 1500 RPM see pdf
Comentarios	overhauled.
Stock	1



Description

Used Sabroe SMC 106 S MK2

Used JCI Sabroe SMC 106 S Ammonia NH3 reciprocating compressor. Our capacity table is based on ammonia NH3. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available). *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

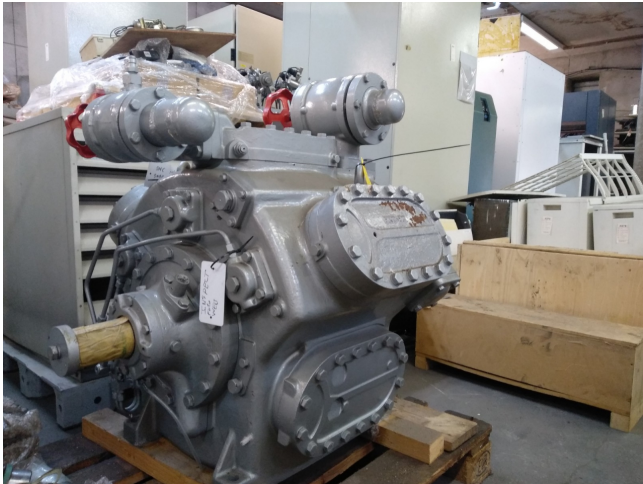

Model	Number of cylinders	Swept volume at 5500 rpm	Swept volume at 3800 rpm	7072										Unit dimensions in mm			Weight excluding motor	Sound pressure level at 5500 rpm	Sound pressure level at 3800 rpm
				Nominal capacities in kW at 5500 rpm					Nominal capacities in kW at 3800 rpm										
				Single-stage		Booster	Single-stage		Booster	L	W	H							
-50/+32°C	0/+40°C	-40/-10°C	-10/+32°C	0/+40°C	-40/-10°C														
SMC 104 S	4	226	271	127	195	35	153	235	42	201-265	1213	1229	1195	79	82	82			
SMC 104 L	4	303	339	181	250	47	198	300	57	261-365	1213	1229	1215	80	83	83			
SMC 104 E	4	339	N/A	203	266	50	N/A	N/A	N/A	200-265	1213	1229	1220	80	83	83			
SMC 106 S	6	339	407	190	291	56	229	352	64	286-390	1267	1267	1260	81	85	85			
SMC 106 L	6	424	509	247	375	71	267	400	85	286-390	1267	1267	1260	82	84	84			
SMC 106 E	6	509	N/A	304	439	87	N/A	N/A	N/A	286-390	1267	1267	1260	82	84	84			
SMC 108 S	8	452	543	255	391	71	306	469	85	211-215	1361	1267	1395	82	84	84			
SMC 108 L	8	566	679	330	500	94	396	600	111	211-215	1361	1267	1630	83	85	85			
SMC 108 E	8	679	N/A	406	612	116	N/A	N/A	N/A	211-215	1361	1267	1630	83	85	85			
SMC 112 S	12	679	824	382	586	106	409	703	127	3279-3687	1475	1448	2205	83	85	85			
SMC 112 L	12	848	1128	485	750	141	510	900	160	3279-3687	1475	1448	2280	83	86	86			
SMC 112 E	12	1028	N/A	609	918	171	N/A	N/A	N/A	3279-3687	1475	1448	2300	83	86	86			
SMC 116 S	16	905	1086	500	762	141	621	938	170	3329-3737	1536	1465	2505	84	86	86			
SMC 116 L	16	1131	1387	689	1000	188	791	1200	226	3329-3737	1536	1465	2525	84	87	87			
SMC 116 E	16	1357	N/A	812	1224	221	N/A	N/A	N/A	3329-3737	1536	1465	2590	84	87	87			