

Bock HGX22e/160-4 S Compressor package

Specifications

Marca	Bock
Tipo	HGX22e/160-4 S Compressor package
Refrigerante	Freon
kW at 0°C/+40°C	11,20
kW at -5°C/+40°C	9,17
kW at -10°C/+40°C	7,54
kW at -20°C/+40°C	4,81
kW at -30°C/+40°C	2,75
kW at -40°C/+40°C	1,33
Sober Bancada	✓
Presostatos	✓
Recipiente de líquido	✓
Recipiente de líquido ltr.	19
Separador de aceite	✓
La línea de líquido filtro	✓
secador	
Mirilla	✓
Panel de control	✓
m3 / h	13
Package / Rack	✓
Tamaños	900x670x1400 mm
Stock	1



Description


Used Bock HGX22e/160-4 S Compressor package

Used Bock HGX22e/160-4 S compressor unit. Complete with liquid receiver, oil separator, control panel, pressure safety switches and liquid line filter.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also arrange the logistics.



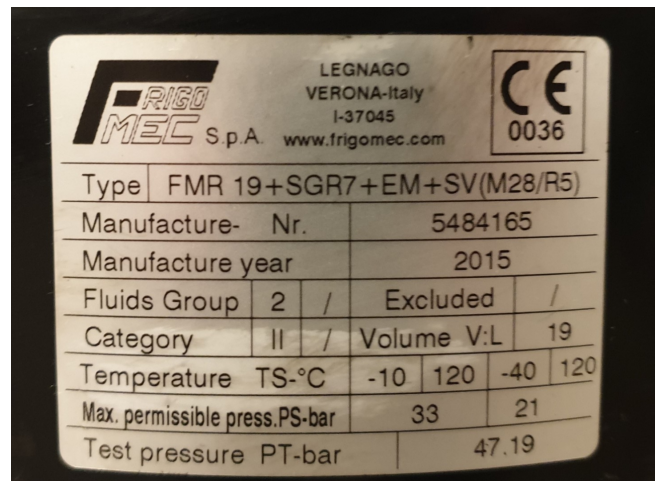

R404A/R507		Performance data												50 Hz	
Type	Cond. temp. °C	Cooling capacity $\dot{Q}_0$ [W]												Power consumption P_e [kW]	
		Evaporating temperature °C													
		7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45		
HGX12P/60-4 S ¹⁾	30 Q	6535	5989	4990	4108	3336	2667	2094	1610	1207	878	616	414		
	P	1,20	1,22	1,23	1,20	1,15	1,08	1,00	0,91	0,81	0,71	0,62	0,53		
	40 Q	5537	5060	4191	3428	2764	2193	1706	1297	959	684	465	296		
HAX12P/60-4	P	1,49	1,48	1,43	1,37	1,28	1,18	1,06	0,95	0,83	0,71	0,61	0,52		
	50 Q	4535	4128	3390	2748	2195	1723	1324	993	722	503	329			
	P	1,72	1,69	1,60	1,49	1,37	1,24	1,10	0,96	0,83	0,70	0,59			
HGX12P/75-4 S ¹⁾	30 Q														
	P														
	40 Q														
HAX12P/75-4	P														
	50 Q														
	P														
HGX12P/90-4 S ¹⁾	30 Q	8160	7498	6284	5227	4288	3469	2764	2164	1661	1246	911	648		
	P	1,52	1,54	1,55	1,50	1,45	1,37	1,26	1,15	1,03	0,91	0,79	0,68		
	40 Q	6934	6357	5304	4419	3606	2902	2299	1789	1364	1015	734	513		
HAX12P/90-4	P	1,91	1,89	1,83	1,73	1,63	1,50	1,37	1,23	1,08	0,94	0,81	0,69		
	50 Q	5729	5238	4345	3632	2945	2355	1855	1435	1087	804	577			
	P	2,21	2,17	2,05	1,92	1,78	1,62	1,45	1,29	1,12	0,96	0,82			
HGX12P/110-4 S ¹⁾	30 Q														
	P														
	40 Q														
HAX12P/110-4	P														
	50 Q														
	P														
HGX12P/125-4 S ¹⁾	30 Q	9738	8948	7500	6085	5000	4052	3231	2529	1937	1446	1047	730		
	P	1,85	1,86	1,86	1,78	1,69	1,58	1,46	1,32	1,18	1,03	0,89	0,75		
	40 Q	8288	7600	6344	5145	4202	3381	2676	2075	1571	1155	817	549		
HAX12P/125-4	P	2,27	2,25	2,17	2,02	1,88	1,72	1,56	1,39	1,21	1,04	0,88	0,72		
	50 Q	6863	6276	5212	4219	3418	2727	2137	1640	1226	886	611			
	P	2,66	2,60	2,46	2,25	2,06	1,85	1,65	1,44	1,24	1,04	0,86			
HGX12P/160-4 S ¹⁾	30 Q														
	P														
	40 Q														
HAX12P/160-4	P														
	50 Q														
	P														
HGX22e/125-4	30 Q	13400	12400	10500	8790	7250	5870	4650	3590	2680	1920	1320	857		
	P	2,19	2,23	2,26	2,24	2,16	2,03	1,88	1,69	1,49	1,28	1,07	0,878		
	40 Q	11660	10700	8970	7460	6090	4880	3820	2900	2120	1490	992	640		
HAX22e/125-4	P	2,77	2,75	2,68	2,58	2,41	2,22	2,00	1,76	1,52	1,28	1,06	0,853		
	50 Q	9650	8860	7390	6080	4910	3880	2990	2230	1610	1110	749			
	P	3,26	3,19	3,03	2,84	2,60	2,34	2,07	1,80	1,53	1,27	1,03			
HGX22e/160-4	30 Q														
	P														
	40 Q														
HAX22e/160-4	P														
	50 Q														
	P														
HGX22e/125-4	30 Q	16900	15600	13200	10900	8880	7320	5850	4560	3450	2510	1770	1170		
	P	2,77	2,75	2,78	2,73	2,62	2,47	2,29	2,07	1,84	1,59	1,34	1,08		
	40 Q	14500	13400	11200	9170	7400	6000	4800	3750	2800	2050	1450	970		
HAX22e/125-4	P	3,42	3,40	3,40	3,30	3,18	2,96	2,62	2,42	2,19	1,91	1,62	1,28		
	50 Q	12100	11100	9150	7480	6090	4860	3790	2860	2090	1460	971			
	P	4,00	3,92	3,73	3,51	3,21	2,92	2,52	2,22	1,94	1,68	1,40			