


Bitzer 4H.2 / 4G.2

Specifications

Marque	Bitzer
Le type	4H.2 / 4G.2
Réfrigérant	Freon
kW at 0°C/+40°C	130,7
kW at -5°C/+40°C	108,6
kW at -10°C/+40°C	89,3
kW at -20°C/+40°C	58,3
kW at -30°C/+40°C	35,5
kW at -40°C/+40°C	19,3
Électromoteur Specs	18,5 kW at 1460 RPM
Sur le châssis en acier	✓
Interrupteurs de sécurité de pression	✓
Manomètres	✓
Réservoir de liquide	✓
Séparateur d'huile	✓
Voyant	✓
Remarques	Pulley EM: 220 mm / Compr: 220 mm
Remarques	R404a - R22 or other freon types
Package / Rack	✓
Tailles	2600x800x1880 mm (LxWxH)
Stock	1

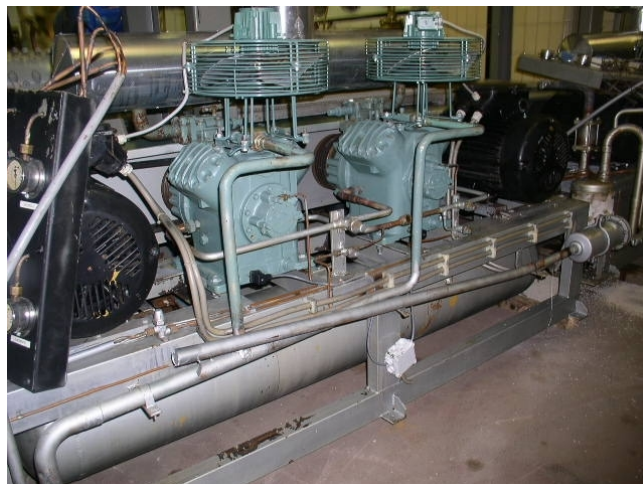

Description

Used Bitzer 4H.2 / 4G.2

Used Bitzer 4H.2 / 4G.2 freon compressor rack, complete with pressure safety switches, pressure gauges, liquid receiver, oil separator and sight glass. This unit has a cooling capacity of 130,7 kW at 0°C/+40°C.

Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

