

Goedhart VCS 145610

Specifications



La marque	Goedhart
Type	VCS 145610
Capacité kW	70
Réfrigérant	Freon
Nombre de ventilateurs	4
Espace Fan in mm	10
Dégivrage	None
m ³ /h	39.673
Tailles	4856x1130x920
Remarks	401m2
Volume	137dm3
Poids	676kg
Stock	2



Description

Used Goedhart VCS 145610

Used evaporator build by Goedhart type VCS 145610 with 70kW 4 fans 50Hz, 3.1A, 401m2, 137dm3, 39.673m3/h, weight 676kg.

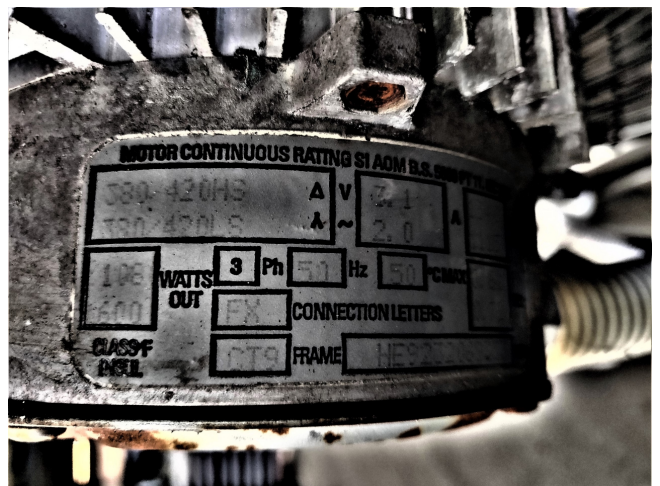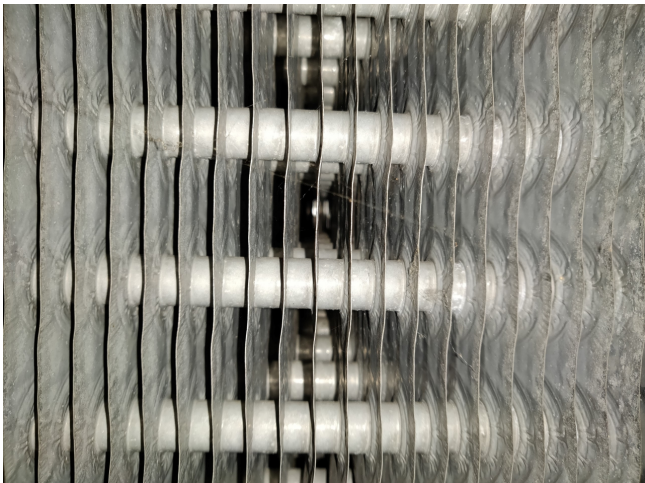

		3x400V-50Hz-4pole (1500 mm³/min.)					Dimensions										Connections							
		R404A															Refrigerant							
		Type VCI					Air volume (25±18°C) (25±18°F) (6.80) (2.00)	Lp @ 3 m (1/2" x 1/2") (2.00)	Surface (dm²)	Internal volume (kg)	Weight (kg)													
		DTI = hK (C-1) (6.410)	DTI = hK (C-2) (6.410)	DTI = hK (C-3) (6.410)	DTI = hK (C-4) (6.410)	L						B	H	C	E	E2	E3	D1	D2	In	Uit	Hot gas	Air throw**	
		kW	kW	kW	kW	mm						mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
		kW	kW	kW	kW	dm³A						dm³	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
4x	6.4.45.10	26,0	18,5	20998	61,3	131	45	283	3656	710	720	600	1628	1628		914	1828	16	35	22,5				
	8.4.45.10	30,7	22,5	20230	61,3	175	60	332	3656	810	720	700	1628	1628		914	1828	16	42	35				
	1.4.45.10	35,9	25,5	19504	61,3	219	75	380	3656	910	720	800	1628	1628		914	1828	16	42	35				
	6.4.50.10	34,7	24,7	29492	64,0	164	57	384	4456	830	720	700	2028	2028		1114	2228	16	42	35				
	8.4.50.10	42,5	30,1	28618	64,0	219	75	444	4456	930	720	800	2028	2028		1114	2228	16	42	35				
	1.4.50.10	48,9	34,3	27801	64,0	274	94	503	4456	1030	720	900	2028	2028		1114	2228	22	42	35				
	6.4.56.10	49,6	35,5	41615	67,7	241	83	511	4856	930	900	800	2228	2228		1214	2428	16	42	35				
	8.4.56.10	60,5	40,9	40587	67,7	321	110	595	4856	1030	900	900	2228	2228		1214	2428	22	54	35				
	1.4.56.10	70,0	48,1	39673	67,7	401	137	676	4856	1130	900	1000	2228	2228		1214	2428	22	54	35				
	6.4.63.10	64,2	45,5	51237	71,5	228	113	686	5256	945	1120	800	2428	2428		1314	2628	22	54	42				
	8.4.63.10	76,9	55,2	50412	71,5	438	150	794	5256	1045	1120	900	2428	2428		1314	2628	22	54	42				
	1.4.63.10	89,4	63,2	49586	71,5	547	187	899	5256	1145	1120	1000	2428	2428		1314	2628	22	54	42				