

Goedhart VNS-65407

Specifications


La marque	Goedhart
Type	VNS-65407
Capacité kW	27
Réfrigérant	Freon
Nombre de ventilateurs	5
Espace Fan in mm	7
Dégivrage	Hot Gas
m ³ /h	16.670
Tailles	4200x1000x580 mm
Remarques	Y.O.B. 2004
Volume	44 dm ³
Poids	298 kg
Stock	3





Description

Used Goedhart VNS-65407

Used Goedhart VNS 65407 evaporator with hotgas defrosting. 5 Woods fans 50 Hz - 0,15 kW - 1360 RPM - diameter 400 mm.

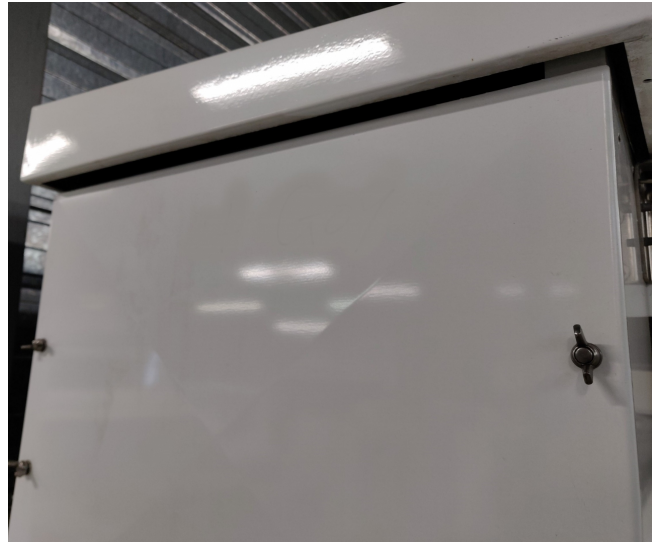

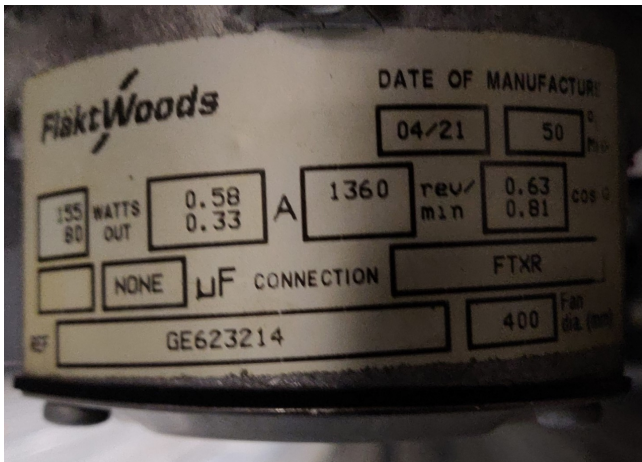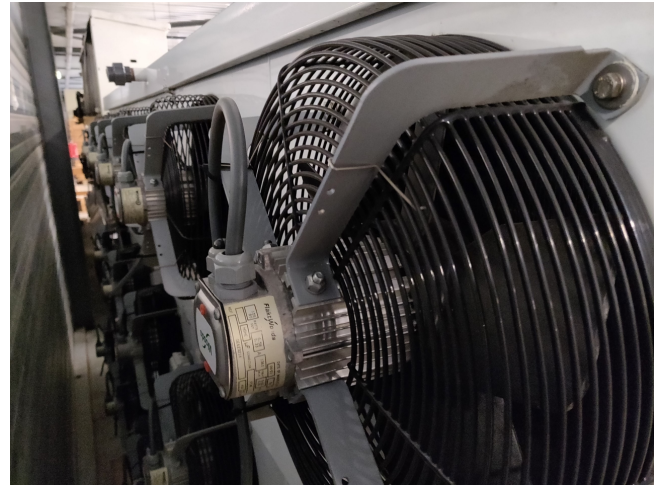

Type	2x400V-50Hz-4 pole - A (1500 rpm)						Fans		Electrical details			
	Capacity			Capacity		Air volume m³/h						Sound pressure indication (LpA) at 3 m (+/- 2 dB(A))*
	DTM (R404A)		DT1 (R404A)	DT1-MK Air cond°C 4 / 0								
	DTM-MK S/+2	DTM-MK S/+1	DTM-MK S/0	DT1-MK Air cond°C 4 / 0	Surface		Number	Diameter	Coil block	Drip tray		
VNS	kW	kW	kW	kW	kW	m³/h	dB(A)	m²	mm	kW	kW	kW
6.3.35.7	13.6	11.3	8.9	11.5	6950	57	77	3	350	3.36	2.07	5.43
6.4.35.7	17.7	13.5	11.2	14.9	9260	58	102	4	350	4.66	2.76	7.42
6.5.35.7	22.7	18.8	13.3	19.8	11580	58	128	5	350	5.68	2.34	8.02
6.6.35.7	27.9	23.0	17.7	23.5	13890	59	154	6	350	6.72	2.74	9.46
6.7.35.7	33.1	25.9	20.8	27.5	16200	59	179	7	350	7.76	3.12	10.88
6.8.35.7	38.2	30.7	22.9	31.9	18520	60	205	8	350	8.80	3.52	12.32
6.3.40.7	19.9	15.9	12.5	16.8	10005	56	107	3	400	4.40	2.46	6.86
6.4.40.7	26.5	21.6	16.7	22.4	13340	57	142	4	400	5.68	2.34	8.02
6.5.40.7	32.1	26.0	20.9	27.0	16670	58	178	5	400	6.72	2.74	9.46
6.6.40.7	40.4	32.0	23.6	33.8	20000	59	213	6	400	8.28	3.34	11.62
6.3.45.7	30.6	24.4	19.2	25.7	15490	60	162	3	450	8.28	2.34	10.62
6.4.45.7	40.7	33.2	25.7	34.4	20660	61	216	4	450	10.08	2.92	13.00
6.5.45.7	51.5	41.5	32.1	43.4	25820	62	270	5	450	12.42	3.52	15.94
6.6.45.7	59.7	49.6	38.8	50.7	30980	63	325	6	450	15.60	4.16	19.76
6.5.50.7	59.3	48.8	37.0	52.1	35310	69	284	5	500	13.20	3.74	16.94
6.6.50.7	72.1	56.2	45.1	63.2	42380	69	341	6	500	16.56	4.38	20.94

* = Sound pressure indication (LpA) at 3 m distance of each air cooler (+/- 2 dB(A)), free field conditions, according EN13487

Air coolers details

* = Sound pressure indication (LpA) at 3 m distance each air cooler (+/- 2 dB(A)), free field conditions, according EN13487

Air coolers details