

Sabroe SMC 106 S

Specifications

Merk	Sabroe
Type	SMC 106 S
Koudemiddel	NH 3 (ammonia)
kW at 0°C/+40°C	293
kW at -10°C/+40°C	191*
kW at -40°C/+40°C	53#
Elektromotor Specs	40/60kW
Op stalen frame	✓
Druk veiligheids schakelaars	✓
Manometers	✓
Vloeistof tank	✓
Vloeistof tank ltr.	62
Opmerkingen	*capacity is based on -10°C/+35°C // #capacity based on -40°C/-10°C and 1500 RPM see pdf // Electromotor 40/60kW at 980/1480 RPM
Gewicht in kg.	1380
Stock	1





Description

Used Sabroe SMC 106 S

Gebruikte, goed onderhouden SMC 106S Ammonia Nh3 zuigercompressor. Onze capaciteitstabel is gebaseerd op ammoniak NH3. Zie voor alle andere specificaties de afbeelding van het typeplaatje van de fabrikant of het bijgevoegde pdf-bestand (indien beschikbaar). * Waarom kiezen voor HOSBV? We waren niet alleen de grootste specialist in gebruikte koeling in Europa, maar we leveren ook alle apparatuur, inclusief een uitgebreide test, garantie en industriële reiniging. * Optioneel kunnen we ook een nieuwe verfbeurt uitvoeren en de logistiek regelen.



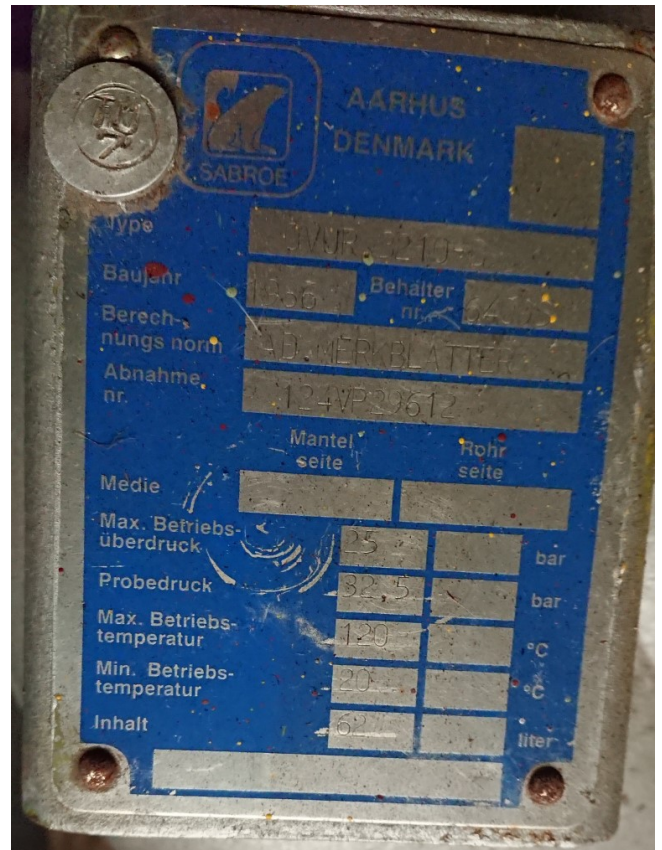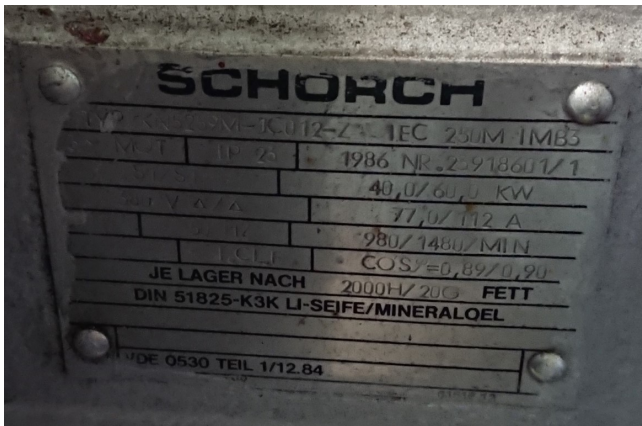



Your partner for used commercial and industrial refrigeration equipment

Model	Number of cylinders	Swept volume at 1500 rpm cm ³ /h	Swept volume at 3000 rpm cm ³ /h	*1212 *						Unit dimensions in mm			Weight excluding motor kg	Sound pressure level at 1500 rpm dB(A)	Sound pressure level at 3000 rpm dB(A)
				Nominal capacities in kW at 1500 rpm			Nominal capacities in kW at 3000 rpm								
				Single/high-stage		Booster	Single/high-stage		Booster	L	W	H			
				-10/+32°C	0/+40°C	-40/-30°C	-10/+32°C	0/+40°C	-40/-30°C						
SMC 104 S	4	226	271	127	195	35	153	235	42	2261-2865	1213	1229	1196	79	82
SMC 104 L	4	263	339	165	250	47	198	300	57	2261-2865	1213	1229	1215	80	83
SMC 104 E	4	339	N/A	253	326	58	N/A	N/A	N/A	2261-2865	1213	1229	1220	80	83
SMC 106 S	6	339	407	151	215	58	229	352	64	2286-2890	1267	1247	1180	81	83
SMC 106 L	6	424	526	247	375	71	297	450	85	2286-2890	1267	1247	1400	82	84
SMC 106 E	6	509	N/A	324	439	87	N/A	N/A	N/A	2286-2890	1267	1247	1420	82	84
SMC 108 S	8	422	543	253	381	71	306	489	85	2315-2915	1363	1247	1195	82	84
SMC 108 L	8	566	679	330	500	94	396	600	113	2315-2915	1363	1247	1630	83	85
SMC 108 E	8	679	N/A	406	612	116	N/A	N/A	N/A	2315-2915	1363	1247	1650	83	85
SMC 112 S	12	679	854	382	586	106	459	703	127	3279-3687	1475	1448	2255	83	85
SMC 112 L	12	848	1018	495	750	141	593	900	169	3279-3687	1475	1448	2280	83	86
SMC 112 E	12	1018	N/A	609	918	173	N/A	N/A	N/A	3279-3687	1475	1448	2330	83	86
SMC 126 S	16	905	1086	530	782	141	611	938	170	3529-3737	1536	1445	2505	84	86
SMC 126 L	16	1131	1357	689	1000	188	791	1200	226	3529-3737	1536	1445	2535	84	87
SMC 126 E	16	1387	N/A	852	1224	231	N/A	N/A	N/A	3529-3737	1536	1445	2590	84	87