

DWM D6DH4 350X AWM/D Cool unit

Specifications


Merk	DWM
Type	D6DH4 350X AWM/D Cool unit
Koudemiddel	Freon
kW at 0°C/+40°C	88.56
kW at -5°C/+40°C	74
kW at -10°C/+40°C	61.32
kW at -20°C/+40°C	40.89
kW at -30°C/+40°C	25.74
Op stalen frame	✓
Filter droger	✓
m3 / h	106
Opmerkingen	Our capacity table is based on Manufacturer spec. We would like to know which refrigerant is in your system
Gewicht in kg.	262
Stock	1



Description

Used DWM D6DH4 350X AWM/D Cool unit

Gebruikte semi-hermetische compressor van DWM-Copeland model D6DH-350X. U kunt deze compressor (en) ook gebruiken op alternatieve typen Freon. Voor alle andere specificaties (indien beschikbaar), zie de afbeelding van het typeplaatje van de fabrikant of het bijgevoegde pdf-bestand. * Waarom kiezen voor HOSBV? We waren niet alleen de grootste specialist in gebruikte koeling in Europa, maar we leveren ook alle apparatuur, inclusief een uitgebreide test, garantie en industriële reiniging. * Optioneel kunnen we ook een nieuwe verfbeurt uitvoeren en de logistiek regelen.

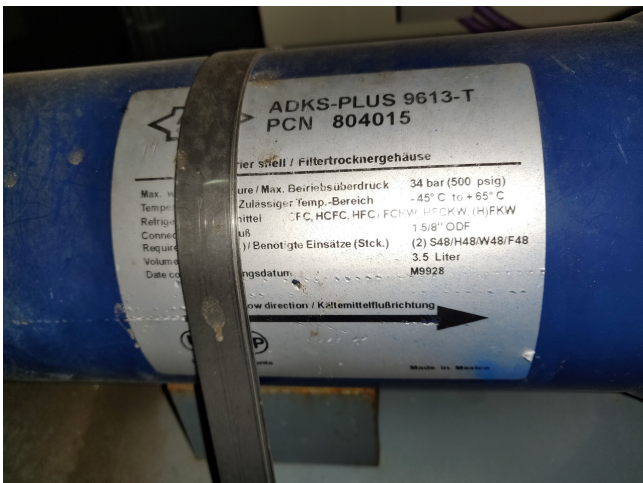

Cooling capacity [kW]

t _c \ t _e	-35	-30	-25	-20	-15	-10	-5	0	5
20	28.45	36.00	45.02	55.71	68.25	82.85	99.69	118.96	140.86
25	26.29	33.47	41.99	52.05	63.82	77.52	93.32	111.42	132.00
30	24.11	30.92	38.94	48.36	59.37	72.15	86.91	103.83	123.11
35	21.90	28.35	35.86	44.64	54.88	66.76	80.47	96.22	114.18
40	-	25.74	32.75	40.89	50.35	61.32	74.00	88.56	105.21
45	-	23.11	29.62	37.11	45.80	55.86	67.48	80.87	96.21
50	-	20.45	26.45	33.30	41.21	50.35	60.93	73.14	87.16
55	-	17.76	23.24	29.46	36.58	44.82	54.35	65.37	78.07

Power input [kW]

t _c \ t _e	-35	-30	-25	-20	-15	-10	-5	0	5
20	11.47	12.81	14.10	15.28	16.30	17.13	17.72	18.02	17.98
25	12.03	13.53	15.01	16.39	17.66	18.75	19.62	20.22	20.52
30	12.54	14.20	15.85	17.44	18.93	20.27	21.42	22.33	22.95
35	13.01	14.81	16.63	18.42	20.13	21.72	23.14	24.34	25.28
40	-	15.38	17.36	19.34	21.26	23.09	24.77	26.26	27.51
45	-	15.89	18.03	20.19	22.32	24.38	26.32	28.09	29.64
50	-	16.36	18.66	20.99	23.32	25.60	27.79	29.83	31.68
55	-	16.80	19.23	21.74	24.26	26.76	29.18	31.49	33.64