


Sabroe SAB 128 HF man VI

Specifications

Marka	Sabroe
Typ	SAB 128 HF man VI
Czynnik chłodzący	NH 3 (ammonia)
kW at +10°C/+40°C	426,9
kW at 0°C/+40°C	504,0
kW at -5°C/+40°C	414,3
kW at -10°C/+40°C	337,2
kW at -20°C/+40°C	255,8
kW at -30°C/+40°C	160,3
kW at -40°C/+40°C	92,6
Silnik elektryczny Specs	50 Hz - 149 kW - 3560 RPM
Rozładunek	✓
Kontrolka wydajności	✓
Podstawa na stalowej ramie	✓
Separator oleju	✓
Zawór elektromagnetyczny	✓
Panel kontrolny	✓
m ³ / h	454 m ³ /h at 2950 RPM & 547 m ³ /h at 3550 RPM
Rozmiary	2200x1100x1640 mm (LxWxH)
Stock	1

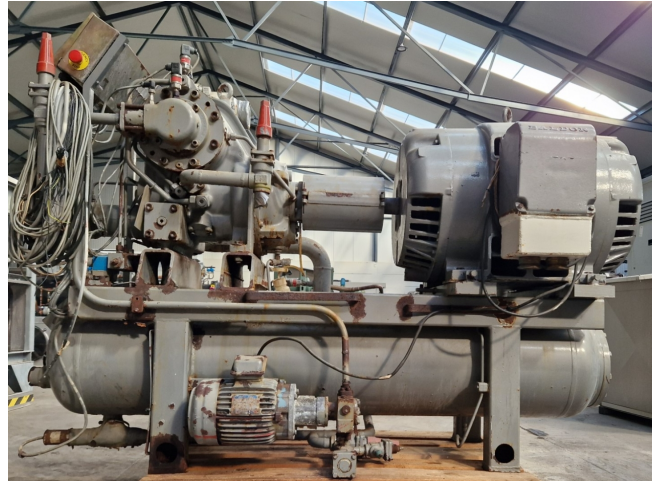

Description

Used Sabroe SAB 128 HF man VI

Used Sabroe SAB 128 HF screw compressor on R717 (Ammonia). Complete with a Baldor electric motor - 50 Hz - 149 kW - 3560 RPM, oil separator, oil cooler, oil pump and a Unisab 2 controller. The compressor has a displacement of 454 m³/h at 2950 RPM & 547 m³/h at 3550 RPM. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if it has passed our extensive test. Warranty and industrial cleaning are included in your purchase. *If requested we are happy to arrange your shipment.

