


Bitzer 4T.2 (x2)

Specifications

Brand	Bitzer
Type	4T.2 (x2)
Refrigerant	Freon
kW at +10°C/+40°C	65,6
kW at 0°C/+40°C	45,7
kW at -5°C/+40°C	37,7
kW at -10°C/+40°C	30,7
kW at -20°C/+40°C	19,4
kW at -30°C/+40°C	11,3
kW at -40°C/+40°C	5,6
Electromotor Specs	5,5 kW at 1450 RPM (x2)
Unloaded Start	✓
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Liquid receiver	✓
Liquid receiver ltr.	30 ltr.
Sight Glass	✓
Solenoid Valve	✓
Remarks	# // Pulley EM: 160 mm / Comp. 220 mm
Remarks	R404a - R22 or other freon types
Package / Rack	✓
Sizes	1720x1200x600 mm (LxWxH)
Stock	1

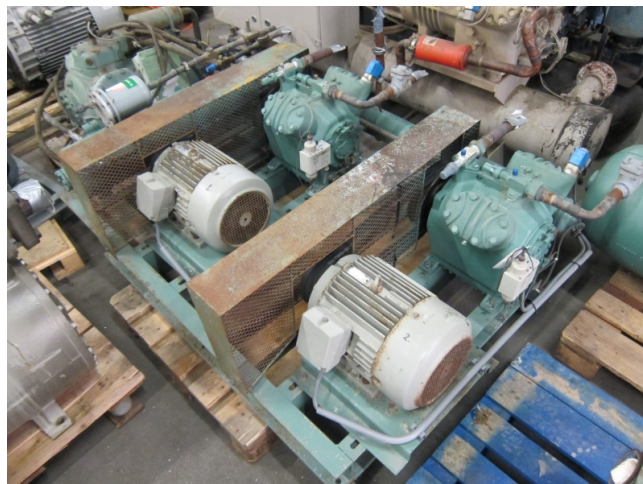

Description

Used Bitzer 4T.2 (x2)

Used Bitzer 4T.2 (x2) freon compressor rack, complete with unloaded start, pressure safety switches, sight glass, solenoid valve and liquid receiver with a volume of 30 liters. This unit has a cooling capacity of 65,6 kW at +10°C/+40°C.

Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics.

